



Explore!
.....The Safety Brand.....

RYXO
EMERGENCY
EXIT LIGHTS

www.ryxosafety.com

Owned By
Clearway Safety & General Trading
Abudhabi - UAE
+971 561080825





Contents

EXIT LIGHT

Pages 3-7

MODEL 1.....	Page 3
MODEL 2.....	Page 4
MODEL 3.....	Page 5
MODEL 4.....	Page 6
MODEL 5.....	Page 7





PURPOSE OF EMERGENCY LIGHTING

Emergency lighting is one of the most important safety systems in any property. It enables the quick and safe escape from the property in case of emergency. By definition, emergency lighting covers both emergency exit lights and emergency lights. The required performance of emergency and emergency exit lights is specified in international standards. All our emergency and emergency exit lights and our central battery units meet the requirements of the applicable standards, and all the required documentation is available for them.



VISIBLE LIGHTS

Emergency exit lights must be visible. The most important characteristic of emergency exit lights is visibility: the luminaires and their symbols must stand out from the surroundings both in normal lighting and when power is lost. All our emergency exit lights meet the requirements of the European standards.

EMERGENCY EXIT LIGHTS TECHNOLOGY

Emergency Exit Lights are a vital part of the safety and security of any property. Emergency exit lights are designed to guide people to safety during an emergency by helping them find and escape along predetermined emergency exit routes.

Emergency exit lights are part of a stand-alone system, which means they will remain lit during a power failure. Emergency exit light signs contain directional arrows indicating the way out of a building.

RYXO SAFETY offers a comprehensive range of emergency exit lights, suitable for virtually any location. By using the latest LED technology, RYXO SAFETY has been able to design emergency exit lights that not only meet the high standards set for them, but also look stylish and discreet. Examples of our design capabilities include an emergency exit light with a silvery metal frame, and a recessed emergency exit light that leaves only a thin glassy light plate visible.



Exit Light



MODEL 1

CODE

#14813



● TEST :

Used to control the operation

● CHARGE :

Charging Equipment

● TROUBLE :

Equipment In Trouble

● POWER :

Fully Charged

VOLTAGE	AC85-265V,50/60 Hz
POWER	2W
LED	14 Led High Brightness
CHARGING TIME	24 Hours
EMERGENCY LIGHTING TIME	2 Hours
RECHARGEABLE NICKEL CABIUM BATTERY	3.7V1800mAh
EMITTING COLOR	Green
WEIGHT	500 gm
INSTALLATION	Wall Mounted
DIMMER SUPPORT	No
FUNCTION	Automatic Switch

GLASS THICKNESS

3mm

MATERIAL

Plastic



INSTALLATION : CEILING MOUNT & WALL MOUNT

MATTERS NEEDING ATTENTION

- 1.Keep the switch off and start charging for 24 hours
- 2.Keep the equipment away from moisture and dust
- 3.High and low power consumption
- 4.If something goes wrong,turn on amber indicator(consult technical support)



Exit Light



WhatsApp



MODEL 2

CODE

#13900

STICKER CODE

#13894



VOLTAGE	AC220-240V,50/60 Hz
POWER	4W
BEAM ANGLE	120°
LIGHT SOURCE	SMD
CRI	>70
LIFE SPAN	2500h
WORKING TEMPERATURE	-10~45°C
MATERIAL	Plastic
BATTERIES	3.6V 600mAh Ni-cd battery
CHARGE TIME	13-15Hours
DURATION	2 Hours
INSTALLATION	Wall-Mounted
FEATURES	Overdischarge & Overcharge Protection Emergency & Automatic Light-Up



Exit Light



WhatsApp



MODEL 3

CODE

#14673



CHARGE :
Charging Equipment
TROUBLE :
Equipment In Trouble
POWER :
Fully Charged



VOLTAGE	AC220/110 ,50-60Hz
POWER	1W
LED	4 Led High Brightness
CHARGING TIME	24 Hours
EMERGENCY LIGHTING TIME	3 Hours
RECHARGEABLE NICKEL CABMIUM BATTERY	1.2V,600mAh
EMITTING COLOR	Green
WEIGHT	470 gm
INSTALLATION	Chandelier
DIMMER SUPPORT	No
FUNCTION	Automatic Switch



GLASS THICKNESS

3mm

MATERIAL

Aluminium , Glass

INSTALLATION : CHANDELIER

MATTERS NEEDING ATTENTION

- 1.Keep the switch off and start charging for 24 hours
- 2.Keep the equipment away from moisture and dust
- 3.High and low power consumption
- 4.If something goes wrong,turn on amber indicator(consult technical support)



Exit Light



WhatsApp



MODEL 4


CODE

#14764



- **CHARGE :**
Charging Equipment
- **TROUBLE :**
Equipment In Trouble
- **POWER :**
Fully Charged

VOLTAGE	AC 220-240V , 50-60Hz
POWER	3W
LED	8 Led High Brightness
CHARGING TIME	24 Hours
EMERGENCY LIGHTING TIME	180 Min
RECHARGEABLE NICKEL CABBMIUM BATTERY	1.2V 600mAH Ni-Cd
EMITTING COLOR	Green
WEIGHT	410 gm
INSTALLATION	Chandelier
DIMMER SUPPORT	No
FUNCTION	Automatic Switch

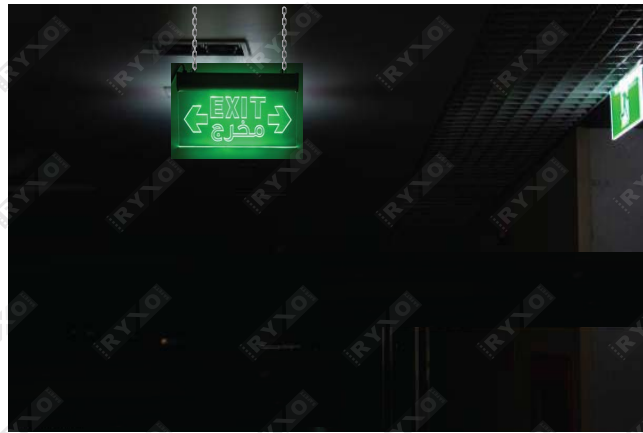

INSTALLATION : CHANDELIER

MATTERS NEEDING ATTENTION

- 1.Keep the switch off and start charging for 24 hours
- 2.Keep the equipment away from moisture and dust
- 3.High and low power consumption
- 4.If something goes wrong,turn on amber indicator(consult technical support)

GLASS THICKNESS

3mm

MATERIAL

Metal



Exit Light



MODEL 5

CODE

#14167



- **CHARGE :**
Charging Equipment
- **TROUBLE :**
Equipment In Trouble
- **POWER :**
Fully Charged



VOLTAGE	AC 220-240V , 50-60Hz
POWER	3W
LED	8 Led High Brightness
CHARGING TIME	48 Hours
EMERGENCY LIGHTING TIME	90 Min
RECHARGEABLE NICKEL CABIUM BATTERY	1.2V 600mAH Ni-Cd
EMITTING COLOR	Green
WEIGHT	368 gm
INSTALLATION	Chandelier
DIMMER SUPPORT	No
FUNCTION	Automatic Switch

GLASS THICKNESS

3mm

MATERIAL

Metal



INSTALLATION : CHANDELIER

MATTERS NEEDING ATTENTION

- 1.Keep the switch off and start charging for 24 hours
- 2.Keep the equipment away from moisture and dust
- 3.High and low power consumption
- 4.If something goes wrong,turn on amber indicator(consult technical support)

